

Product specification


Model: BXQ010/020GX

File No:

Version: V1.0

Date	Version	Change history	Author	Approve
2020.01.27	V1.0	First edition	Ray He	

DYNAMIC LIGHT BOX

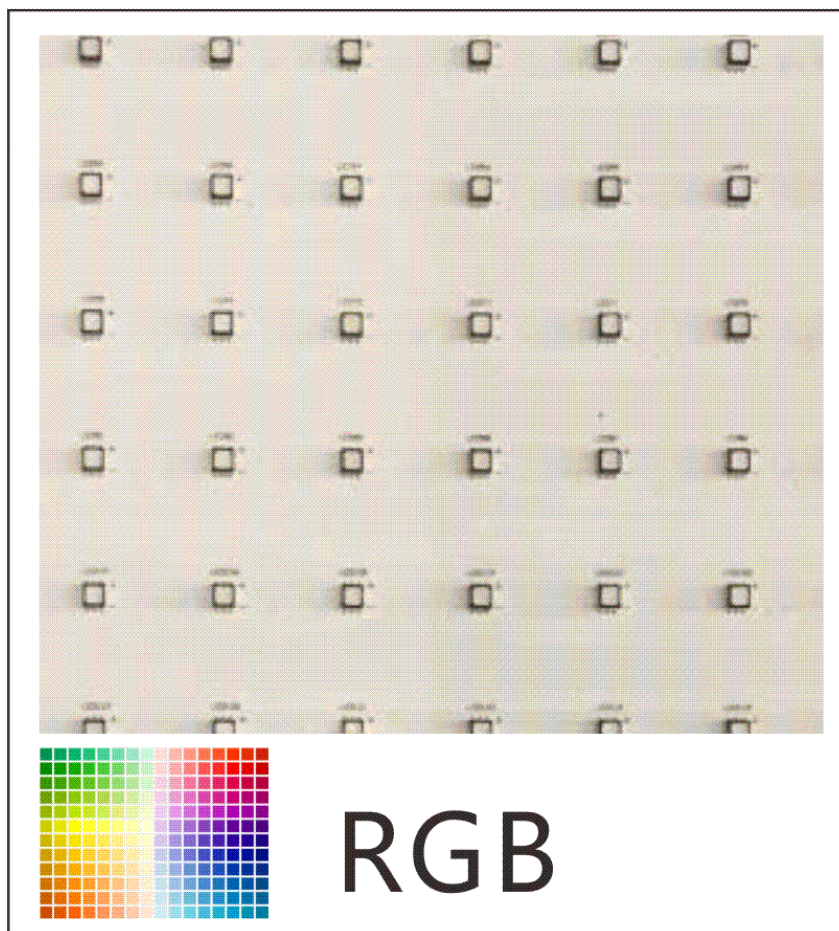

BXQ010GX
BXQ020GX



1. Features

- ◆ DC5V low voltage power supply, safe and reliable
- ◆ Pixel pitch 10/20mm(0.394"0.787"), delicate running animation
- ◆ Easy to build by modular design
- ◆ Easy and flexible print change and video upload

2. Applications

- ◆ Bus stop
- ◆ Subway light box
- ◆ airport light box
- ◆ Exhibition light box
- ◆ Shop product display light box

3. Standard Dimensions

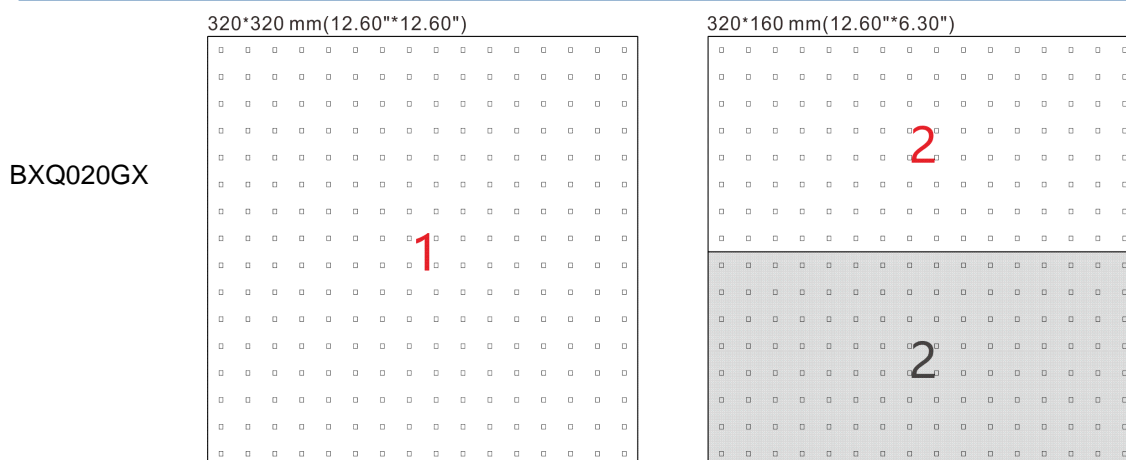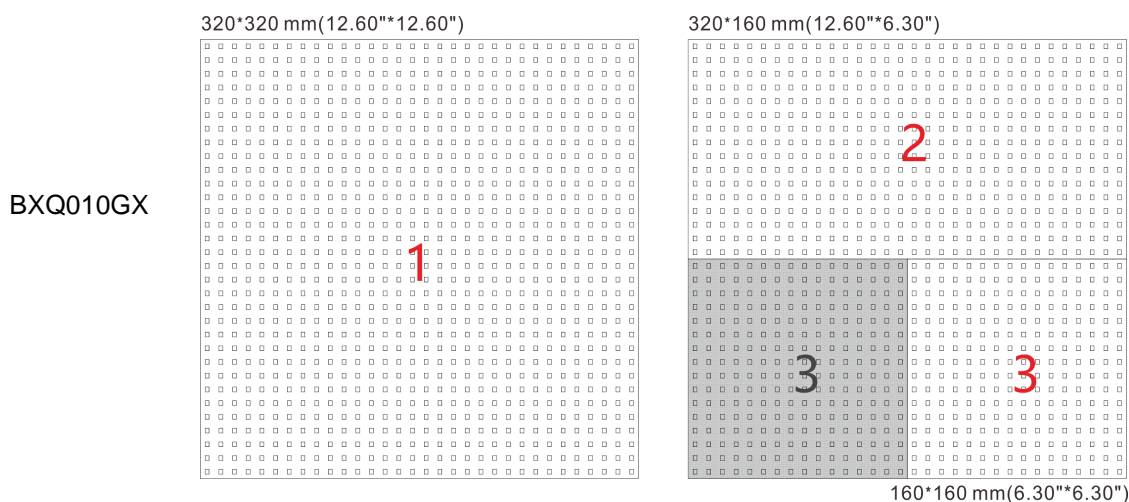

Block type combination

Acceptable customization within a certain range

4. Specification

Model	Dimensions	Input Voltage	LED	LED Qty	Power
BXQ010GX	320*320 mm (12.60"*12.60")	DC5V	SMD3535/2727 RGB	1024	24 W
	320*160 mm (12.60"*6.30")			512	12 W
	160*160 mm (6.30"*6.30")			256	6 W
BXQ020GX	320*320 mm (12.60"*12.60")	DC5V	SMD3535/2727 RGB	256	24 W
	320*160 mm (12.60"*6.30")			128	12 W

Note: The power will be different with different control mode and can be customized in a certain range.

5. Attention

- ◆ Panels need to be used with controller.
- ◆ If you have any questions before installation and use, please contact our technicians.
- ◆ Please refer to the product's degree of protection for use in a suitable environment.
- ◆ Please use proper power supply, improper voltage may cause product damage.
- ◆ Be careful when handling, installing, removing or moving; do not bump.
- ◆ For detailed installation and wiring, please refer to the wiring diagram of the corresponding project.