

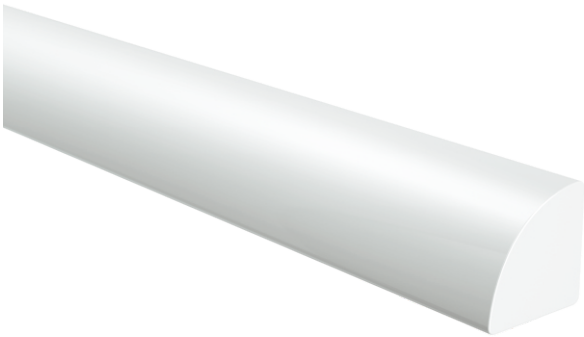
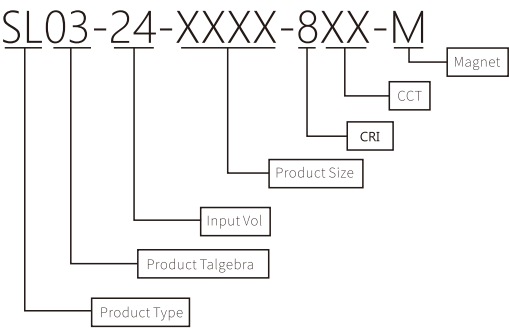


Item Description

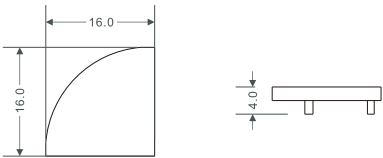

Product Size

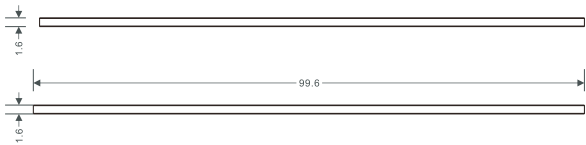

Description

Item	Size/mm	Power/w	Lumen/PC	Color Available/K
SL03-24-XXXX-8XX-M	1150	11.5	1100	2700-7100
SL03-24-XXXX-8XX-M	1050	10.5	1000	2700-7100
SL03-24-XXXX-8XX-M	950	9.5	900	2700-7100
SL03-24-XXXX-8XX-M	850	8.5	800	2700-7100
SL03-24-XXXX-8XX-M	750	7.5	700	2700-7100
SL03-24-XXXX-8XX-M	650	6.5	600	2700-7100
SL03-24-XXXX-8XX-M	550	5.5	500	2700-7100
SL03-24-XXXX-8XX-M	450	4.5	400	2700-7100
SL03-24-XXXX-8XX-M	350	3.5	300	2700-7100
SL03-24-XXXX-8XX-M	250	2.5	200	2700-7100

Product	Parameter
Input Vol	DC 12V/24V
LED Product	SMD 3014/2835
Beam Angle	120°
CRI	80-90
Lumen/Power	≥70 lm/W
Texture	Alum/PC
Working temps	
Life	≥ 30000hrs

Product Feature

- Available at wood and Iron Shelf
- No grain on the surface, soft light
- All size is customized
- Input Vol 12V/24V

Installation

- Magnet
- Clips

